

High Speed 802.11n ADSL2+ Wireless Gateway

N
150

- **Standard-based WPS for easy and secure WLAN establishment**
- **Robust SPI Firewall protection**
- **Remote provisioning and management through TR-069**
- **IPv6 support**
- **Parental control scheduling by different interface and MAC address**
- **ROM-D feature for distributor/operator easy customization**

Benefits

802.11n technology for extreme performance and coverage

The ZyXEL AMG1202-T10B features 802.11n technology that provides a solution for ultimate speed and coverage. With data rates of up to 150 Mbps, the AMG1202-T10B provides stable, reliable wireless connections for high-speed data and multimedia delivery. It eliminates dead zones and extends coverage by taking advantage of IEEE 802.11n technology and is backward compatible with any IEEE 802.11 b/g Wi-Fi certified device. Besides, AMG1202-T10B supports multiple SSIDs with individual security and scheduling settings that facilitates different service levels for service providers.

Wi-Fi Protection Setup (WPS)

Wi-Fi Protected Setup (WPS) is a standard for easy and secure establishment of wireless networks. With WPS, the device will automatically configure a wireless network with a network name (SSID), strong WPA data encryption and authentication. WPS makes the configuration of secure personal wireless networks as simple as pushing a button or entering a Personal Identification Number (PIN) code.

Robust SPI Firewall security

The SPI Firewall works on the network layer by examining header and footer of a packet, and it also ensures the packet belongs to a valid session. Based on Stateful Packet Inspection (SPI), Denial of Service (DoS) and Distributed DoS (DDoS) features, the AMG1202-T10B provides the first-line defense against hackers, network intruders and other harmful threats.

Quality of Service (QoS) support

The AMG1202-T10B comes equipped with essential ATM QoS features. Service providers can freely design their QoS policy and prioritize the mission-critical services such as IPTV and VoIP based on their service plans. This increases network efficiency and productivity to enable service providers to bring real multi-play into the daily life of residential users.

TR-069 remote management

With TR-069 standard management specifications, service providers are able to manage and configure client devices remotely without manual intervention from end users. This unique feature not only offers true "plug-and-play" experience but also reduces the complexity of deployment, and therefore saves operating and maintenance costs for service providers.



AMG1202-T10B
Wireless N-lite ADSL2+
4-port Gateway



Specifications

System Specifications

ADSL Compliance

- ITU 992.1 (G.dmt)
- ITU 992.3 ADSL2 (G.dmt.bis)
- ITU 992.5 ADSL2+
- Reach-Extended ADSL (RE ADSL)
- Annex L/M support

WLAN

- IEEE 802.11n compliance, backward compatible with 11b/g
- Frequency operation: 2.4 GHz
- 64/128 bits WEP data encryption
- WPA/WPA2 (Wi-Fi Protected Access) security
- Wireless scheduler
- Wi-Fi Protected Setup (WPS)

Router

- NAT
- Port forwarding
- SIP ALG pass-through
- PPPoE pass-through
- Dynamic DNS
- IP alias
- DHCP server/client/relay
- RIP I/RIP II support
- IGMPv1 and v2 support
- IGMP proxy/snooping
- UPnP support
- 802.1Q/1P
- IPv6 support

Firewall

- Stateful Packet Inspection (SPI)
- Denial of Service (DoS) prevention

Security

- Multiple VPN (IPSec, PPTP) pass-through
- Packet filtering
- URL keyword blocking

Management

- Embedded Web configuration
- TR-069 HTTPS support
- Logs and statistics
- SNMP v1 and v2 with MIB II
- Remote management control: Telnet, FTP, Web, SNMP and DNS
- CLI command via telnet/console

Hardware Specifications

- ADSL port: 1 x RJ-11
- Ethernet port: 4 x RJ-45
- Power input: 9 V DC
- Power on/off button
- Reset button
- WLAN on/off button
- WPS button
- One 3 dBi internal antenna
- LED displays:
 - Power
 - Ethernet (1-4)
 - WLAN
 - WPS
 - DSL
 - Internet

Physical Specifications

- Item dimensions (WxDxH): 164 x 115 x 28 mm (6.46" x 4.53" x 1.1")
- Item weight: 201 g (0.44 lb.)
- Packing dimensions (WxDxH): 296 x 147 x 37 mm (11.65" x 5.79" x 1.46")
- Packing weight: 398 g (0.88 lb.)

Environmental Specifications

Operating Environment

- Temperature: 0°C to 45°C (32°F to 113°F)
- Humidity: 10% to 90% RH (Non-condensing)


Storage Environment

- Temperature: -20°C to 80°C (-4°F to 176°F)
- Humidity: 10% to 95% RH (Non-condensing)

Certification

- Safety: EN60950-1
- EMI: CE, FCC

Application Diagram

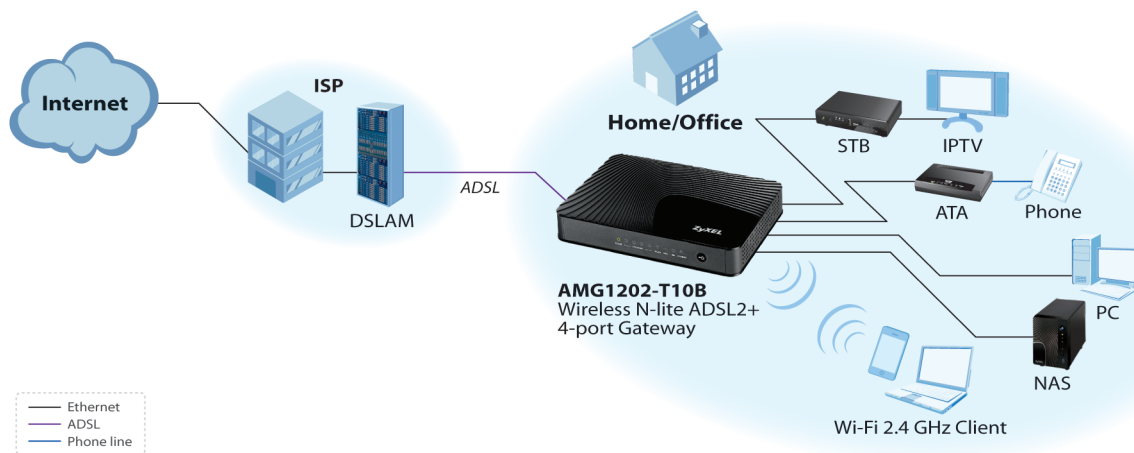

For more product information, visit us on the web at www.ZyXEL.com



Copyright © 2013 ZyXEL Communications Corp. All rights reserved. ZyXEL, ZyXEL logo are registered trademarks of ZyXEL Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.